


Measure from edge of casting
.375

ADJUSTABLE PRESSURE REGULATOR

for


TURBO 400

140 -260 PSI

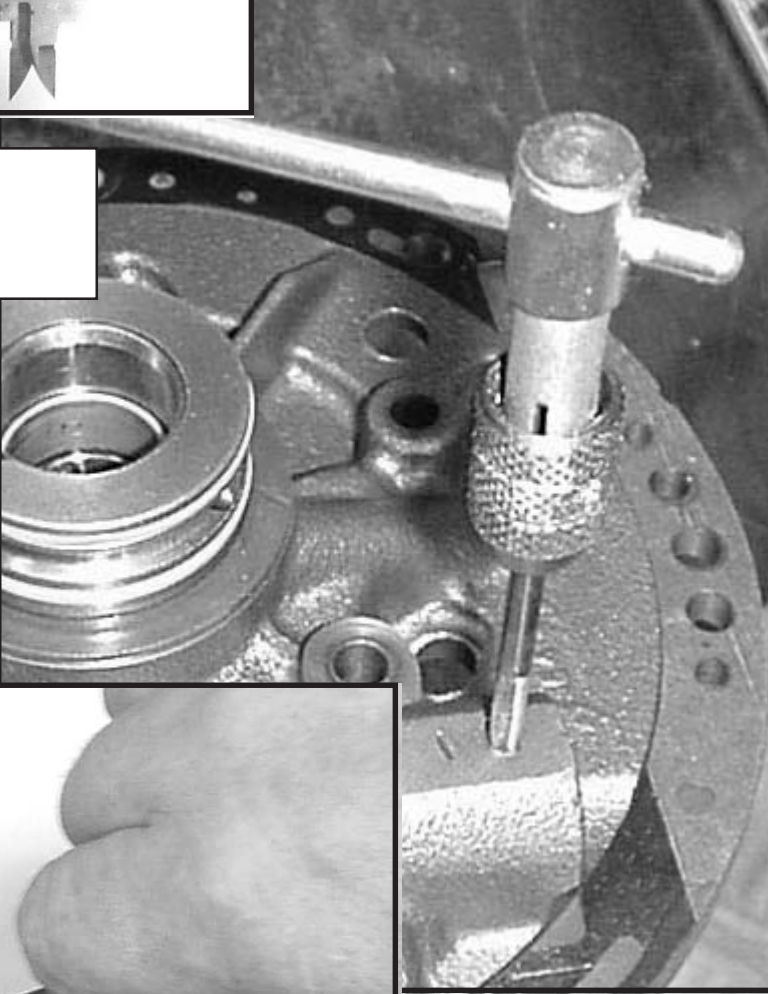

Drill .25
Tap 10 - 24
Remove burrs

Set screw acts as key, Also aids in assembling,
Install pressure valve and spring supplied in kit, (no shims or spacers).
Slide in adjuster body (have adjuster in loose position) past snap ring groove and tighten set screw. Install snap ring,
Loosen set screw to seat adjuster on snap ring and retighten set screw.

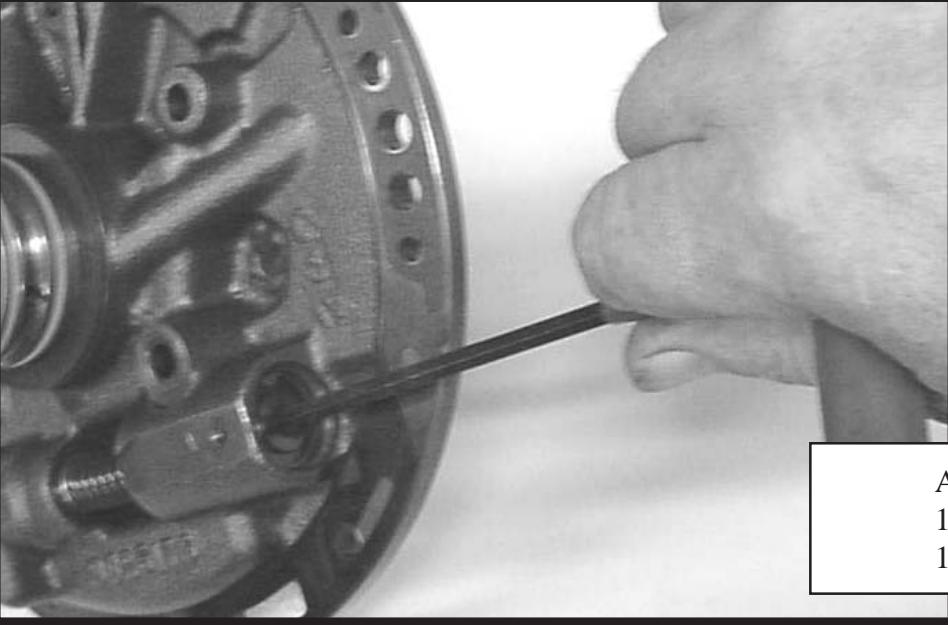

Adjustment Range
140 - 260 #
10 # per turn